

## OPTICAL FIBER CABLE DATA SHEET

### CABLE CODE/CABLE TYPE


A-DQ(BN)(SR)2Y MLT mxn

**MULTI LOOSE TUBE, STEEL TAPE METALIC ARMoured , HDPE JACKET FIBER OPTIC CABLE**

### KEY FEATURES

Metallic Armoured, Jelly Filled Loose Tube, UV- Resistant, Rodent Resistant, Waterproof, PE JACKET

### CABLE DRAWING and CROSS SECTION

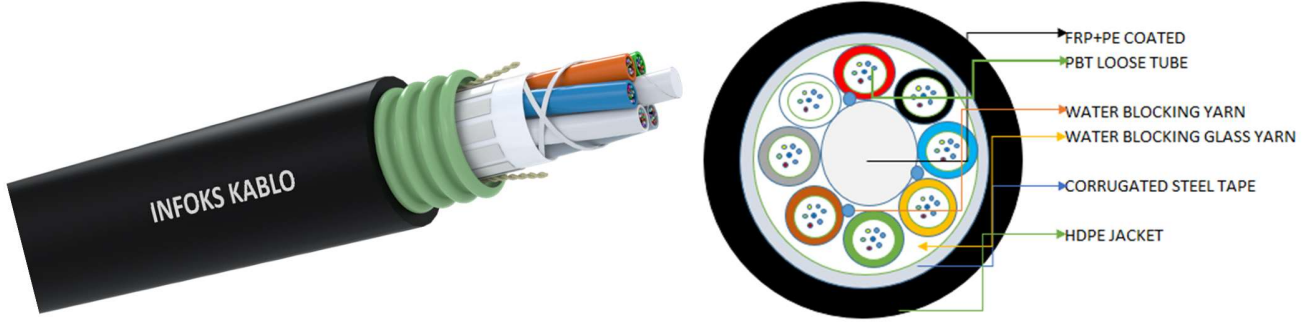

### STANDARTS

IEC 60794-1&2,

### CONSTRCTIONS

Fiber Type	G.652-D,G.657 A1,G.657 A2,OM1,OM2,OM3,OM4,OM5
Fiber Count	12-144
Jacket Color	According to customer request
Jacket UV Resistance	Carbon Black
CPR Class	Fca

### APPLICATIONS

Inter Building Voice or Data Communication Networks  
FTTC  
Outside  
Installed in Ducts & Conduits  
Primary & Secondary Distribution  
WAN  
FTTB  
Campus Cabling  
Directly Buried Underground  
Telecommunication Data Trunk Systems  
Harsh Premises Environments requiring heavy duty protection  
Interconnection of Distribution Boxes, Distribution Frames and the Panels at Customer Side

## DIMENSIONS/PHYSICAL SPECIFICATIONS

									IEC 60794-1-2 Test method
Number of fibers	12	24	36	48	60	72	96	144	
Number of tubes	1	2	3	4	5	6	8	12	
Number of dummy Tubes	5	4	3	2	1	0	0	0	
OD Tube Max. (mm)	2,3								
OD Tube Nom. (mm)	2,1								
OD Tube Min. (mm)	1,9								
OD cable Max. (mm)	12,5						14,5	18,5	
OD cable Nom. (mm)	12,0						14,0	18,0	
OD cable Min. (mm)	11,5						13,5	17,5	
Max. Jacket Thickness (mm)	1,8								
Min. Jacket Thickness (mm)	1,5								
Minimum Bending radius	20 x D								E11
Max. Operating Load (N)	2000								
Maximum Installation Pulling Load (N)	3600								
Crush (N/100mm)	3000								E3
Twist (torsion)	5 turn of 180° on 1m sample, both ways.								E7
Impact resistance									E4
Up to 15mm OD	4.4J ; 3 x 2 times								
15 to 17.5mm OD	7J ; 3 x 2 times								
17 to 20mm OD	10J ; 3 x 2 times								
Over 20mm OD	13J ; 3 x 2 times								
Storage temperature Range	-40°C to +70°C								F1
Operating temperature Range	-40°C to +70°C								F1
Core fluid Penetration	3m sample, 1m head for 24 hours								F5
Nom. Weight (Kg/Km)	140						180	220	

## QUALIFICATION SPECIFICATIONS

Cable Qualification Standards ANSI/ICEA S-104-696 | EN 187105 | Telcordia GR-20 | Telcordia GR-409

## CERTIFICATIONS

RoHS	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system
ISO 14001:2004	Designed, Environmental management systems
ISO 18001:2007	Occupational Health and Safety Assessment Series

## PACKING and DELIVERY LENGTHS

WOODEN DRUMS, standart delivery lengths are 4000mt

## SHEATH MARKING

INFOKS KABLO WEEK/YEAR A-DQ(BN)(SR)2Y xxxF TYPE of FIBRE DRUM NO LENGTH (M)